

THE INDUSTRY'S **BEST WRITTEN GUARANTEE**



Triple Strength Fouling Control



Colorkote[™]

- Triple biocide antifouling power Econea*, Zinc Omadine, Copper Thiocyanate
- Vibrant Colors 6 Basic Colors can be mixed to create thousands of custom colors
- Multi-season performance in fresh, brackish and saltwater conditions
- California Air Quality Compliant 330 g/L VOC
- Compatible with all hull types ideal for fiberglass, aluminum, and steel/iron hulls



Register

Certified



Bold Colors Block Barnacles

With Colorkote, 46,656 custom colors are possible by blending the 6 base colors above in various ratios.



4 White 1 Red

1 Yellow 1 Red

1 Blue 1 Red

4 White 1 Green

1 Black

1 Yellow 1 White

1 White 1 Red

4 Red 1 Blue

4 Blue 1 Yellow

1 White 1 Green 1 White 1 Black

4 Yellow 1 White

4 Yellow 1 Red

4 Blue 1 Red

4 Yellow 1 Blue

4 Green 1 Yellow

1 Yellow 1 Blue

Advanced Fouling Control



Biocop TF™

- Advanced dual biocide PL3 technology
- Maximum protection available for fresh, brackish and saltwater
- Multi-season protection
- ▶ 38.06% Cuprous Oxide
- ▶ 4.14% Zinc Omadine
- Lloyd's Register certified




Lloyd's Register

Light Blue 1202-1

Dark Blue 1230-1



Green 1234-1

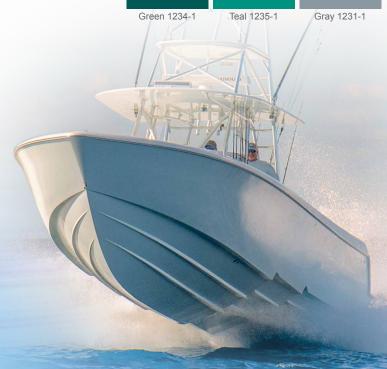



Polishing Ablative



Cukote™

- Semi-hard, polishing ablative finish
- Multi-season protection
- ▶ 47.57% Cuprous Oxide
- Lloyd's Register certified



Now available








330 VOC: 3445-L

Red 3441

330 VOC: 3441-L





Teal 3434 330 VOC: 3434-L

Dark Blue 3430

Shark White 3410

AF33™



- Exceptional value multi-season coating
- 33.6% Cuprous Oxide highest grade available
- Consistent viscosity, better flow and rollability
- Lloyd's Register certified



Semi-Hard Hybrid Ablative

Talon™

Value-priced

Red 6041

- 33.6% Cuprous Oxide
- Consistent viscosity, better flow and rollability



Green 6043

Copper-Free

Smart Solution™

Metal-free self-polishing ablative antifoulant

ECONEA

- Environmentally safe
- Compatible over most existing antifoulants
- Econea
- Lloyd's Register certified

Now Available in Pints for Outdrives




Water-Based



Monterey™

- Water-based semi-hard ablative finish
- Environmentally safe low VOC's
- ▶ 54.67% Cuprous Oxide highest grade available



FOULING CONTROL




Hard Modified Epoxy



Tropikote[™]


- Hard, modified epoxy antifouling
- Protection in extreme tropical conditions
- 75.8% Cuprous Oxide (Highest in the Industry)





Sharkskin™

- High performance hard modified epoxy
- ▶ 45.2% Cuprous Oxide
- Consistent viscosity better flow and rolling ability

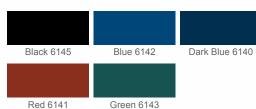

Download Technical and Safety Data Sheets at: www.SeaHawkPaints.com/sdss-tdss



Islands Double Protection



Islands 44 TF™

- Applies directly over tin-based paints
- Tin-free multi-season performance
- Highest grade of cuprous oxide available keeps barnacles away
- 32.7% Cuprous Oxide
- Econea biocide fights both hard and soft growth





Llovd's

Register

Islands 77 Plus™

Dual-Biocide

Red 1001TF

Highest Grade of Cuprous Oxide and Zinc Omadine Available

Teal 1035TF

- Tin-Free Multi-Season Performance
- Consistent viscosity better flow and rollability
- Harder self-polishing polymer binding system



Aluminum Boat Paint



Has no

fouling control

characteristics

Aluma Hawk™

- Ideal for pontoons, jon boats and house boats
- Rust-inhibiting
- Topcoat and/or primer on raw aluminum, fiberglass and other substrates
- Safe for fresh or saltwater submersion

Black Jon Boat Blue Jon Boat Green AH7005 AH7002 AH7033 White

Aluminum Gray AH7031

Jon Boat Tan AH7050

AH7010

PRIMERS



High Build Epoxy Primer Systems

Premium Blister Protection with Microsheet Silicate Technology

Tuff Stuff is an extremely high-build two-part epoxy primer that dries fast, enabling application of a complete barrier system and bottom paint in just two days. Using microsheet silicate technology, millions of microscopic sheets overlap and build a 100% water barrier that protects the surface from moisture and water penetration.



- Highest build epoxy primer
- Low odor during application
- All-in-one osmosis protection
- 1:1 two-part ratio for easy mixing



Available in 1-gal kit



- Low VOC's (280 g/L)
- ▶ 1:1 two-part ratio for easy mixing

Tuff Stuff™ Low VOC



Gray 1286

White 1287

Available in 2-gal kit or 1/2-gal kit.

Gray 1284

White 1285

Primer Systems



S-76 Tack Coat Primer

S-76 Tack Coat Primer is for use on properly prepared steel, aluminum or galvanized steel. S-76 is an anti-corrosive primer that is specifically designed for underwater metal surfaces including hulls, running gear, and the lower units of outboards and I/O's. It provides an excellent barrier to reduce pitting of the metal from galvanic corrosion. S-76 should be used in conjunction with Tuff Stuff Epoxy Primer prior to applying antifoulant/topcoat.



SH-984 Shawkocon™

Shawkocon is a fast drying, general purpose, below the waterline, anti-corrosive primer. A novel single component, fast drying anti-corrosive primer for underwater hull applications to fiberglass, steel, aluminum and wood. Its physical properties and excellent adhesion characteristics provide an easy to use multi-functional primer:

- ▶ Barrier / sealer coating over incompatible or unknown antifoulants to prevent cracking and promote adhesion of a new antifouling paint.
- An excellent barrier coat to reduce pitting of underwater metals from galvanic corrosion on running gear, lower units of outboards, keels, and I/O's, with or without existing intact paint.
- Prevents leaching of chemicals or colors from underlying coats of paint.
- Designed to use as part of a multi-coat system on all underwater hull metal surfaces in the pleasure craft market.
- ▶ Excellent replacement product for 1277 Barrier Coat Primer and 1283 Islands Prime.



Barnacle Blocker™ **Spray Primer**

- Self-cleaning anti-corrosive primer
- Use on underwater metals including steel, cast iron, copper, bronze, lead and aluminum
- Reduces galvanic corrosion
- Zinc-free aerosol spray





TOUGH ON BARNACLES - QUALITY ASSURED!

www.SeaHawkPaints.com



OVER 45 YEARS Hand Crafted in America!

Epoxy Resin System

Hawk Epoxy





Hawk Epoxy Base Resin

Premium quality, marine-grade epoxy resin used for general fiberglass repair and construction with superior adhesion strength, bonding, filling and moisture barrier. Available in Quart (Size 1), Gallon (Size 2) & 5-Gallon (Size 3)



Hawk Epoxy Catalysts

C1 Ultra Slow Cure Catalyst - Very slow cure speed at room temperature. 3:1 ratio R1 Resin to C1.

Available in .66-Pint (Size 1), .33-Gallon (Size 2) & 1.45-Gallon (Size 3)

C2 Slow Cure Catalyst - Slow cure speed. Compatible with higher temperatures. 5:1 ratio R1 Resin to C2.

Available in .4-Pint (Size 1), .8-Quart (Size 2) & .87-Gallon (Size 3)

C3 Fast Cure Catalyst - Fast cure speed. Compatible with cooler temperatures. 5:1 ratio R1 Resin to C3.

Available in .4-Pint (Size 1), .8-Quart (Size 2) & .87-Gallon (Size 3)

C5 Clear Finish Catalyst - Cures to a very clear finish. Longer cure time in warmer temperatures. 3:1 ratio R1 Resin to C5.

Available in .66-Pint (Size 1), .33-Gallon (Size 2) & 1.45-Gallon (Size 3)



Hawk Epoxy Fillers

F1 High Load Adhesive Fiber Filler

F2 Structural Adhesive Filler

F3 Light Density Adhesive Micro Fiber Filler

F4 Bridging Adhesive Filler

F5 Light Density Fairing Filler

F6 MicroSphere Fairing Filler



Hawk Epoxy Pump Kits

Attaches directly to the resin and catalyst containers. Calibrated to yield the perfect mix ratio with one full pump stroke for both the resin and the catalyst.

Kit 30-KT for sizes 1 & 2. Kit 30-KT-S3 for size 3.



Klear Kote™ Table Top Resin

- Marine-grade, two-part epoxy system specifically for coating table tops, furniture and works of art that cures to a clear, glass-like surface
- Resists moisture, scratching and yellowing
- Exceptional self-leveling properties





2031 Islands 44 Reducer

2033 Reducer (General Purpose)

2035 Reducer (Above 85°)

2053 VOC-Exempt Reducer

2084 Tuff Stuff Reducer

7100 Mineral Spirits

7105 Denatured Alcohol

7110 Lacquer Thinner

7115 Toluene

7120 Acetone

7125 Methyl Ethyl Ketone

7135 VM&P Naptha

7130 Xylene

S-80 Wax 'N' Grease Killer

Specialty Products



1280 Marine Paint Stripper

- Removes most types of marine paint and
- Biodegradable, nonflammable, low odor, environmentally safe formula



S-90 Low VOC De-Waxing Etch & Cleaner

- Removes tough surface contaminates
- Water-based and biodegradable



Polyurethane Foam

- Provides excellent insulation, flotation and bonding
- Impervious to solvents and gasoline

Compatibility Chart Last modified: March 2023 SHARKSKIN **Previous** AF 33 BIOCOP TF Hydrocoat: SR, Eco* TROPIKOTE Micron®: CSC, CSC HS, CF, Aquaguard COLORKOTE Extra, Navigator, Extra SPC, TROPIKOTE BIOCIDE PLUS Agua-One CUKOTE CUKOTE 330 Black Widow* Fiberglass Bottomkote® NT Pacifica® Plus **ISLANDS 44 TF** Micron® 66 Fiberglass **ISLANDS 77 PLUS** Odyssey HD* Bottomkote® Aqua Protector* **ISLANDS 99 PLUS** Ultima: SR, SSA, Eco* HRT Eco* Trinidad (All)* MISSION BAY Vivid* HRT Nepture* **MONTEREY** Ultra-Kote **MISSION BAY CSF** Trilux 33 Aerosol HRT Premium* **SMART SOLUTION**

Unepoxy HRT*

Top-Performing	Dual Biocide

Top-Performing Triple Biocide

BIOCOP TF ISLANDS 77 PLUS **ISLANDS 44 TF**

New

Self-Polishing/Ablative

AF 33 CUKOTE **CUKOTE 330 VOC ISLANDS 99 PLUS** TALON

Hard Modified Epoxy

SHARKSKIN TROPIKOTE

Water-Based

MISSION BAY CSF MONTEREY

MISSION BAY **SMART SOLUTION**













Compatibility Chart Legend:

TALON



Products noted as such are registered Trademarks of, or sold by Pettit (KopCoat), and or RPM International, Inc.

Amount of Paint Needed per Coat

Boat Length (Feet)	Per Coat
20-25	3 Quarts
25-30	1 Gallon
30-32	1 Gallon + 1 Quart
33-37	1 Gallon + 2 Quarts
38-40	1 Gallon + 3 Quarts
41-42	2 Gallons
43-44	2 Gallons + 1 Quart
45-46	2 Gallons + 2 Quarts
47-49	2 Gallons + 3 Quarts
50-52	3 Gallons
53-55	3 Gallons + 1 Quart
56-59	3 Gallons + 2 Quarts

*Amounts are estimates and may vary by boat and bottom paint applied. Please see product technical data sheets for exact coverage.

Download Technical and Safety Data Sheets at: www.SeaHawkPaints.com/sdss-tdss



Follow us on Facebook Facebook.com/seahawkpaints







NEW NAUTICAL COATINGS, INC. 800.528.0997 U.S.A. Only • 727.523.8053 Int'l

Email: ContactUs@SeaHawkPaints.com

www.SeaHawkPaints.com

